




rope suspension with the cap of a square or round shape

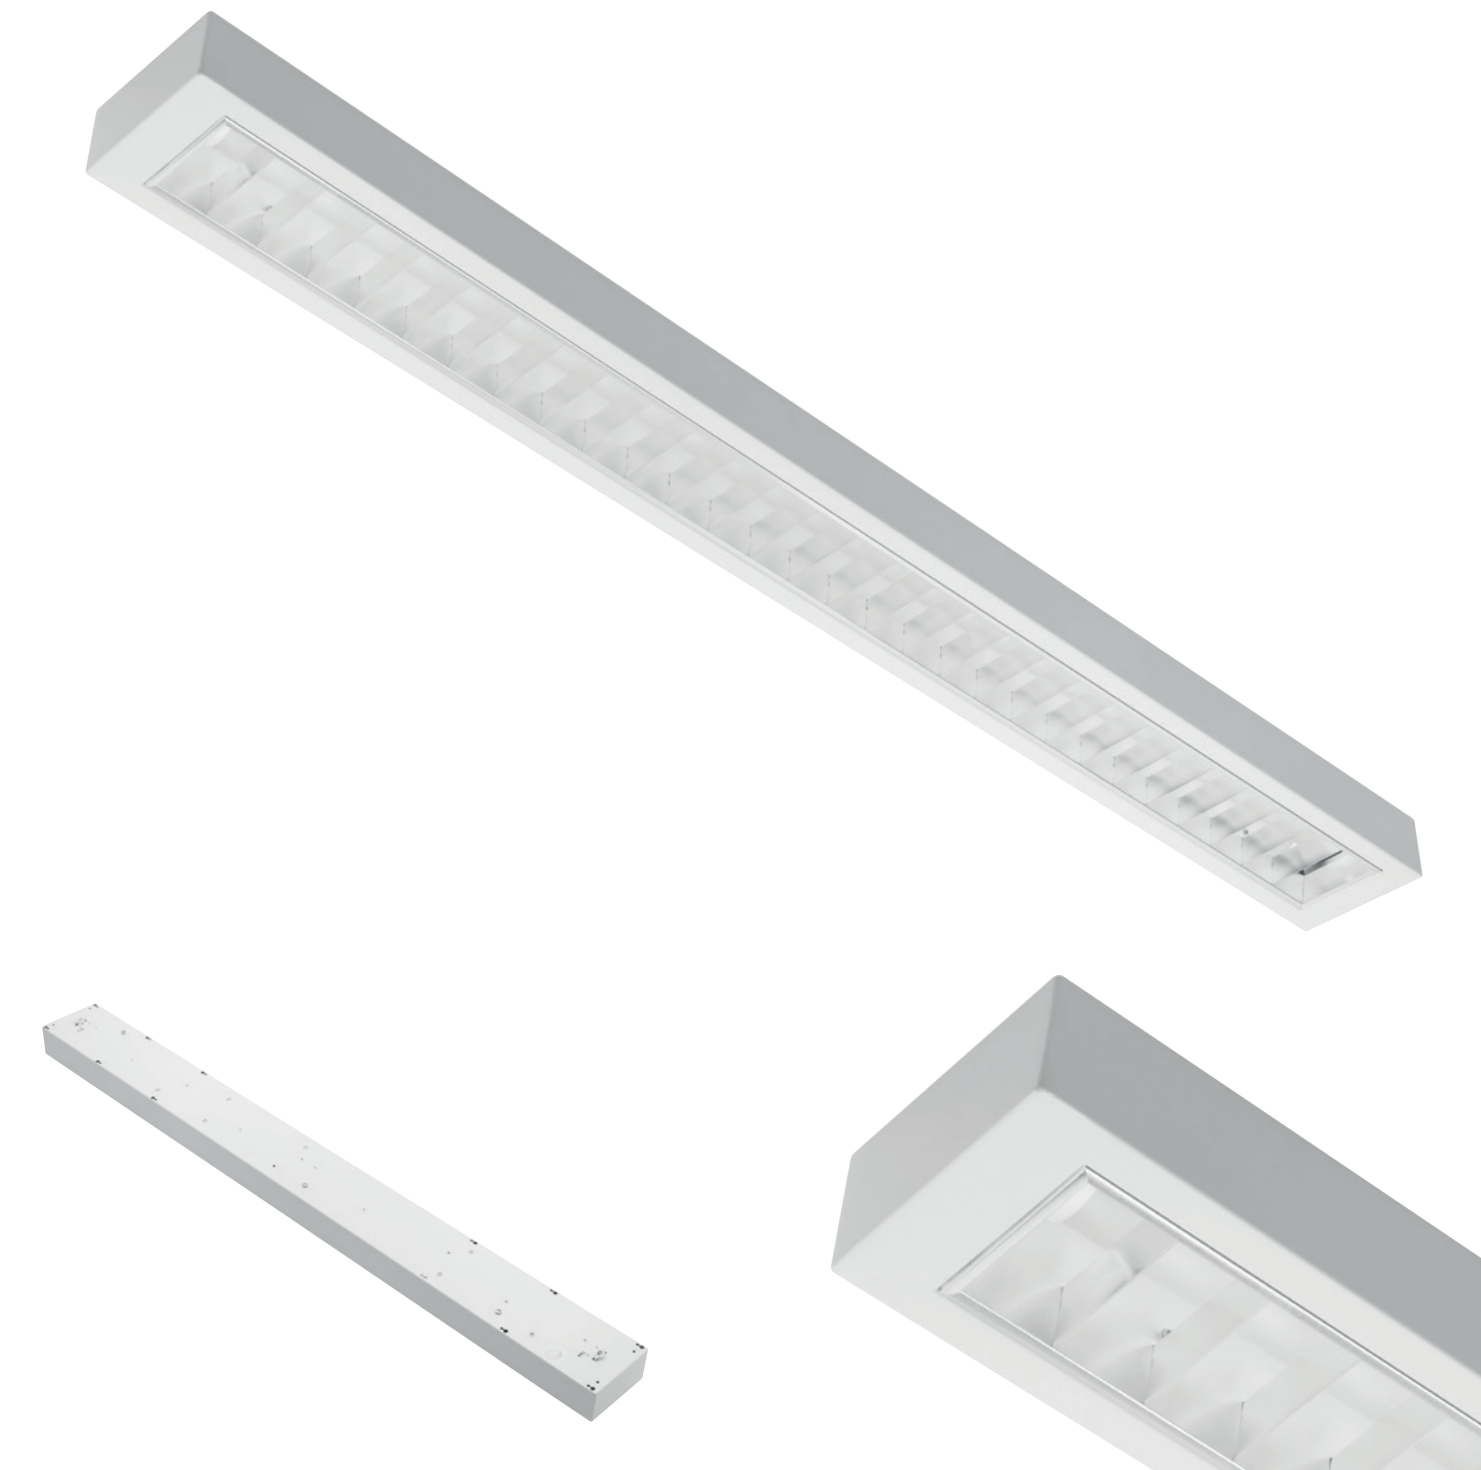

Lambda

Surfaced or suspended luminaire with louvers

Product description


The Lambda luminaire with louvers is a popular choice for commercial applications. Louvers help to control the distribution of light, directing it downwards where it is needed most, also help to reduce glare, which can cause discomfort and eye strain. This is especially important in task areas, such as offices. Its form, hailing from the Lambda range, offers unobtrusive elegance. The installation is surfaced or suspended, and it is easy to install. The optional DALI control also empowers users to personalize their lighting preferences, fostering a productive and adaptable work environment. With a lifespan exceeding 100,000 hours, this luminaire is built to shine brightly for years, providing long-lasting and reliable performance that reduces maintenance costs and environmental impact.

Technical features:

- Mounting: surfaced / suspended
- Optical system: matt parabolic louver PAR MAT-V2 (ML2)
- Beam angle: 65° x 95°
- Housing: sheet steel
- Diffuser: PMMA
- Parabolic louver: matt anodised aluminium
- Accessories: rope suspension RS-S 58 for suspended version (it is not included, it must be ordered separately)
- Chromacity: 3-step MacAdam
- Colour rendering index: min. 80
- Colour temperature: 3000K, 4000K
- Electronic control gear: FIX (ECG), DALI (EDA), on request Emergency unit variant
- Service lifetime (Ta 25°C): 100,000 hours/L90/B10
- Ambient temperature: Ta = -25°C...+35°C
- Degree of protection: IP20
- Dimmensions: M 1234 x 118 x 58 mm, L 1534 x 118 x 58 mm


TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	CRI	CCT (K)
LAMBDA M	5650	45	126	80+	3000
LAMBDA M	5900	45	131	80+	4000
LAMBDA L	7050	55	128	80+	3000
LAMBDA L	7400	55	135	80+	4000

Photometry


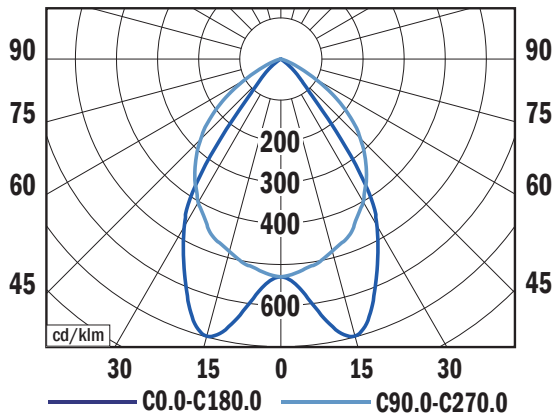


LAMBDA M, 5900 lm 4000 K
LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR <19/<25

Dimmensions

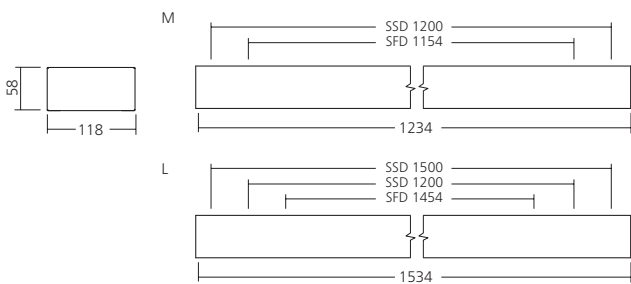

Mounting



* Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.