

# Prettus IP54

Round modern and functional downlight

## Product description


Prettus presents a series of modern and functional downlights in three dimensions, characterized by a wide range of features and options, which make it ideal for different types of interiors. The polished reflector provides a stronger and more direct light beam, while the matte reflector disperses the light more evenly and creates a softer lighting effect. It uses an optical system that combines a diffuser and a reflector. This combination makes it possible to achieve optimal light distribution and eliminate unwanted glare.

## Technical features:

- Mounting: ceiling recessed
- Optical system: polished reflector + cover (PRT), matt reflector + cover (MRT)
- Beam angle: 65° (S, L), 70° (M)
- Housing: sheet steel
- Diffuser: microprismatic PMMA
- Trim: die-cast aluminium
- Reflector: anodised aluminium
- Cover: transparent PMMA, on request opal PMMA
- Chromacity: 3-step MacAdam
- Colour rendering index: min. 80, on request min. 90
- Colour temperature: 3000K, 4000K
- Electronic control gear: FIX (ECG), DALI (EDA), on request Emergency unit variant


TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	CRI	CCT (K)
PRETTUS S	1650	15	110	80+	3000
PRETTUS S	1750	15	117	80+	4000
PRETTUS S	2150	19	113	80+	3000
PRETTUS S	2250	19	118	80+	4000
PRETTUS M	2150	19	113	80+	3000
PRETTUS M	2250	19	118	80+	4000
PRETTUS M	2750	24	115	80+	3000
PRETTUS M	2850	24	119	80+	4000
PRETTUS L	3250	29	112	80+	3000
PRETTUS L	3400	29	117	80+	4000
PRETTUS L	3800	33	115	80+	3000
PRETTUS L	4000	33	121	80+	4000

## Photometry

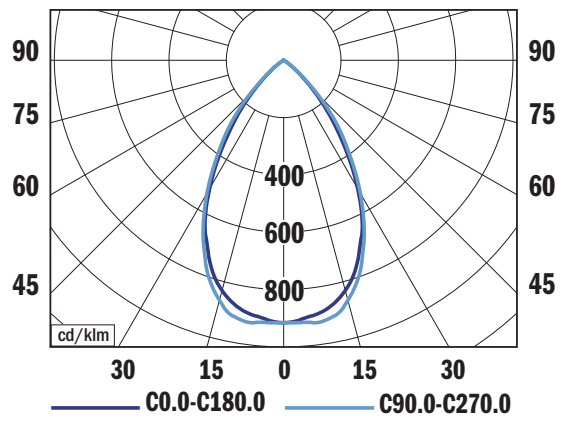


PRETTUS S PRT, 1750 lm 4000 K  
LOR = 100%  
lower flux fraction 100%  
upper flux fraction 0%  
UGR < 19

## Dimensions

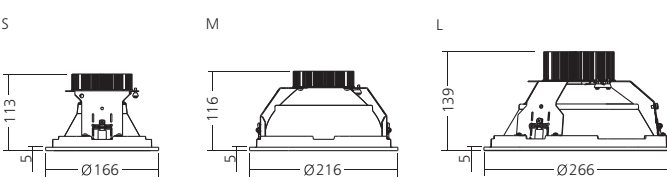

## Mounting

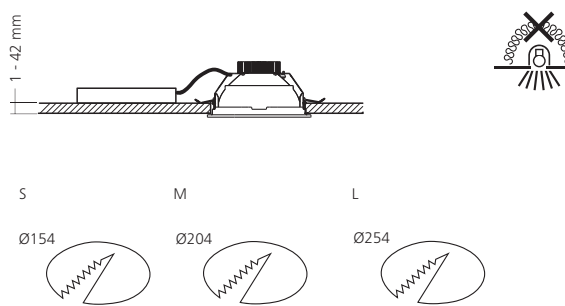

- Service lifetime (Ta 25°C): 100,000 hours/L90/B20
- Ambient temperature: Ta = -20°C...+35°C
- Degree of protection: IP20, optical part IP54
- Dimensions: S Ø166 x 113 mm, M Ø216 x 116 mm, L Ø266 x 139 mm
- Cutout: S Ø154 mm, M Ø204 mm, L Ø254 mm

